


A State-of-art, high performance. MAS - Sureseal Non Asbestos Pump and Valves packing compound with unlimited shelf life is manufactured from inert Non Asbestos self lubricating high tech fibers. High temperature avionics grease and other proprietary binders. MAS-SURESEAL is easier to install and is universal in sealing. The size of equipment is irrelevant; as it is malleable, putty - like product, packed in bulk form. The biggest advantage to use MAS - Sureseal is that IT NEVER NEEDS COOLING WATER and has low initial cost.

Engineered to reduce your maintenance costs



MAS SURESEAL

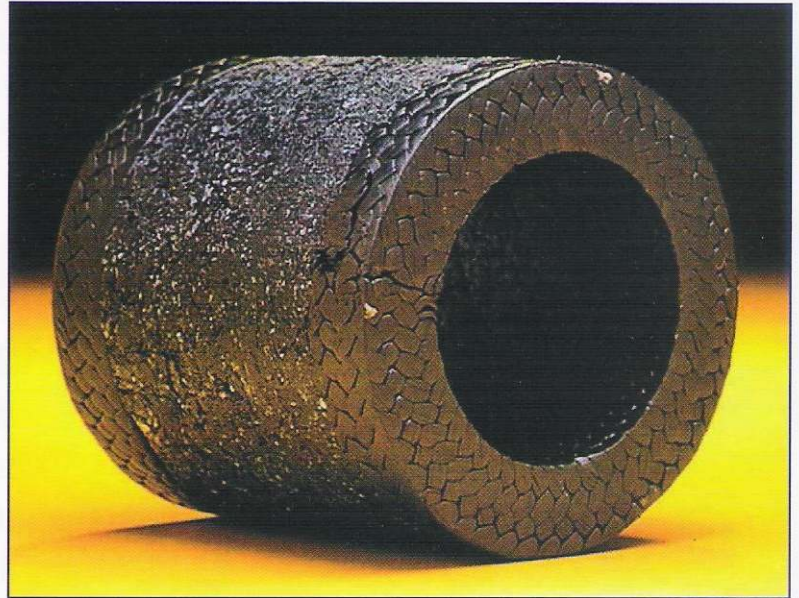

Features

- Malleable, putty-like consistency makes it easy to use and install.
- Utilizes latest chemistry and fiber technology.
- Works well on worn shafts by conforming to odd shapes.
- Low coefficient of friction reduces heat.
- Operates virtually leak free.
- Convenient packaging.

Benefits

- Reduces operating costs.
- Less costly over the life of the pump or valve.
- Saves on energy consumption.
- Reduces or eliminates downtimes.
- Extends equipment life.
- Never needs replacing.
- Reduces shaft and sleeve wear.

Technical Specifications

Grade	Description	Temp	Pressure (Bar)	PH	Applications
SURESEAL 1000	General Service	200C	150	2-12	Water, mild acids
SURESEAL 2000	High performance with bearing pellets	260c	500	0-14	Boiler feed water, caustics, acids
SURESEAL 5000	High performance high temperature	650c	500	0-14	Acids, alkalies, solvents
SURESEAL 7000	Food grade	260c	150	0-14	Pharmaceuticals, potable water
SURESEAL 9000	High strength abrasion resistant	260c	500	2-12	Sewage, sea water, brine and other aqueous media

Installation

The SURESEAL sealants are easily installed with any flat-bladed tool, such as a putty knife or wide-bladed screwdriver, the material can be finger-packed into the stuffing box, or by using a hydraulic gun. An anti-extrusion ring of the appropriate material is placed in the stuffing box around the shaft. A second ring is put in place after the sealant is installed.

When repacking becomes necessary, you do not have to remove the old packing. Just add more sealant packing material by injecting SURESEAL through a fitting installed on the pump or valve stuffing box.

Product Range

- Braided Gland Packings
- M-GRAF Graphite Tapes, Rings & Gaskets
- Expanded PTFE Joint sealants
- Sealon PTFE Thread sealant Tapes
- Non Asbestos Gasket Sheets
- Gland Packing Extractors
- Expanded PTFE Valve Stem Packings



Braided Gland Packings



M-GRAF Graphite Tapes, Rings & Gaskets



MAS

SEALING SYSTEMS (P.) LTD.

ISO 9001 : 2000 REGISTERED COMPANY

231, 5/B Mittal Industrial Estate, Marol, Andheri (E), Mumbai - 400 059, India.

☎ 91-22-28501805 • Fax : 91-22-2850 0314

E-mail : masseal@vsnl.com

Website : www.masseal.com



All the technical information given in this document is correct to the best of our knowledge and based on our experience, but assumes no legal responsibilities and cannot accept any claim for consequential liability.